3 MEGAPIXEL IR BULLET CAMERA

H.264 ONVIF HDMI OUTPUT IP66 OUTDOOR

FEATURES

- 3MP (2048 x 1536) Full Real Time Coding
- Maximum Resolution: 2048 x 1536
- ICR Auto Switch, True Day & Night
- 30 ~ 50m IR Night View Distance
- 3D DNR, Digital WDR
- ROI Coding
- Physical wide dynamic optional
- Support local CVBS video output, two-way voice intercom and PoE power supply
- Support Smart Phone, iPad, Remote Monitoring
- Support P2P
- 2.8~12mm Vari-focal Lens
- H.264 / 48 IR LED
- Water Proof (IP66)
- DC 12V / Black & White Casing

DIMENSIONS

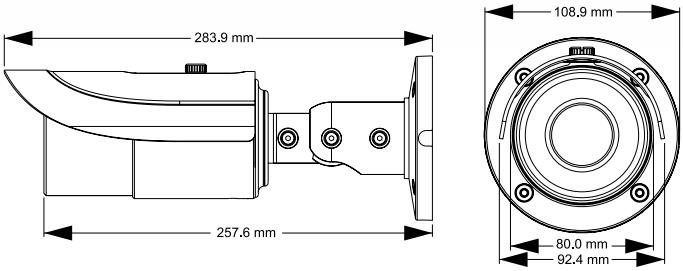

CAMERA		
Image Sensor	1 / 3 “CMOS	
Image Size	1920 x 1080	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux (IR LED ON)	
Lens	2.8 ~ 12 mm Vari-focal Lens	
Lens Mount	CS	Φ14
IMAGE		
Video Compression	H.264 / MJPEG	
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 x 240	
Multi-stream	3MP (1 ~ 30fps) / 1920 x 1080 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) / CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)	
Bit rate	64 Kbps ~ 8 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser	
FUNCTIONS		
Remote Monitoring	IE browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, Protocol SMTP, FTP	
Storage	Network remote storage	
Smart Alarm	Motion Alarm, Sensor alarm	
Day & Night	ICR	
PoE	Yes	
IR Distance	30 ~ 50m	
Water-proof	IP66	
INTERFACES		
Network	RJ45	
Audio	Two-way audio (MIC IN × 1, MIC OUT × 1)	
Video Output	CVBS video output (BNC x 1)	
Storage Card	Support TF card, the max capacity is 64GB	
RS485	Yes	
Alarm Input / Output	1 CH / 1 CH	
OTHERS		
Power Supply	DC 12V / PoE	
Power Consumption	< 4W	
IR Consumption ON	< 8W	
Operating Environment	- 40 °C ~ 50 °C,10 % ~ 90 % humidity	
Dimensions	Φ 109mm × 284mm (Φ 4.3 in x 11.2 in)	
Weight (net)	1107 g (2.44 lbs)	

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only. They may not representing actual products.
All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.